



ACMAR



**EMULSION SPRAYER
ON TRAILER
OR ON SKID - 516**


Tél. +33 (0)2 43 06 14 28
info@acmar.fr

acmar.fr





EXPERIENCE AND HIGH TECHNOLOGY FOR YOUR SURFACE DRESSINGS

The mini sprayer on skid or on trailer

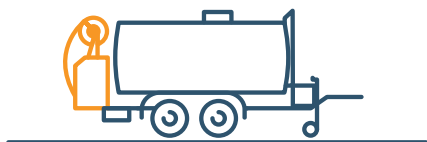

SPRAYING

- Spraying by air pressure
- Equipment in accordance with the EU Pressure Equipment directive PED 97/23 and not subject to regular control
- Diesel motor-compressor unit
- Hand lance with conical jet, swivle union between lance and hose
- 14 m hose fitted on automatic winch
- Easy to use
- Optional : spray bar

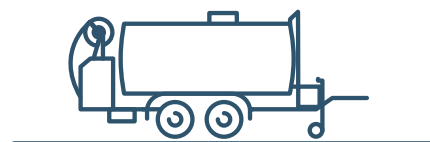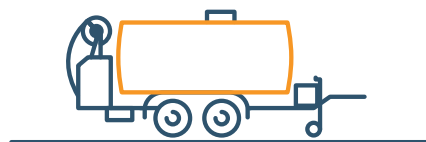

OPTIONAL

- Heat lagging protection coat in stainless steel instead of aluminium
- Electric starter for the motor-compressor unit
- Binder pump instead of air pressure (not compatible with spray bar)
- Lights dual voltage 12/24 V device
- Extinguisher
- Hand lance jet cone

STORAGE / HEATING

- Insulated cylindrical tank. Capacity of 500, 1 000, 1 500 or 2 000 L
- Direct heating with manual fuel burner
- Equipment under GVW 3,5T, mounted on self-braking chassis
- Optional : automatic starter and regulation for burner ; overnight heating with electric rods on 220 or 380 V networks



TYPE	CAPACITY (L)	MEASURES (mm)**	UNLOAD WEIGHT (kgs)	G.V.W. (kgs)
Towed	500	3850 X 1490 X 1600	750*	1300
Removable	500	2310 X 1210 X 1250	490*	990
Towed	1000	4850 X 1580 X 1900	1000*	2500
Removable	1000	3050 X 1580 X 1400	610*	1610
Towed	1500	4850 X 1580 X 1900	1000*	2500
Removable	1500	3050 X 1580 X 1500	670*	2170
Towed	2000	5700 X 1580 X 1950	1500*	3500
Removable	2000	3650 X 1580 X 1500	765*	2765

* Depending of the selected options

** If possible, we can adapt our equipment to the dimensions of your hopper or your flat chassis