



EXPERIENCE AND HIGH TECHNOLOGY FOR YOUR SURFACE DRESSINGS

The spraying quality of a sprayer and the spreading quality of a chipping spreader mounted on 6, 8 or 8 wheeler truck



SPRAYING OF UALITY FOR YOUR JRFACE DRESSING

- · Insulated emulsion tank from 3 500 to 8 000 L
- · Direct or thermic-oil heating with automatic fuel burner
- · 50 m³/h heated binder pump
- · Telescopic spray bar made of 3 arms: width from 3.6 to 4.4 m
- · Stainless steel pneumatic jets, removable, 100 mm centerline for a triple overlap on the ground
- · Dosage from 0.2 to 2.5 L/m²
- 3 spraying modes: fixed; jet by jet; linear
- Hand lance
- Optional: ADR, spray bar thermic fluid heating, overnight heating





OPTIMAL CHIPPINGS SPREADING


- Hopper from 6,5 to 12 m³
- Pushing shield, rail guided, automatic
- Telescopic chippings spreaders 3,6 to 4,4 m with extracting rollers
- Chippings from 2 to 15 mm
- Dosage from 2,5 L/m² to 16 L/m²
- Chippings boxes for shovel
- Optional: filling crane, 3,5T and/or heavy duty hook



SECURITY **MAINTENANCE** RESPECT OF THE **ENVIRONMENT**

- · All spraying and cleaning operations managed from the cab
- · Filling dome access with secured platform
- Care and maintenance designed from the conception of the machine
- Elements positioned consistently and all accessible from the ground
- Automatic cleaning device without any binder rejection on the ground
- Jobs & consumption follow up
- Chippings savings regarding traditionnal chipping spreaders
- Rearview camera



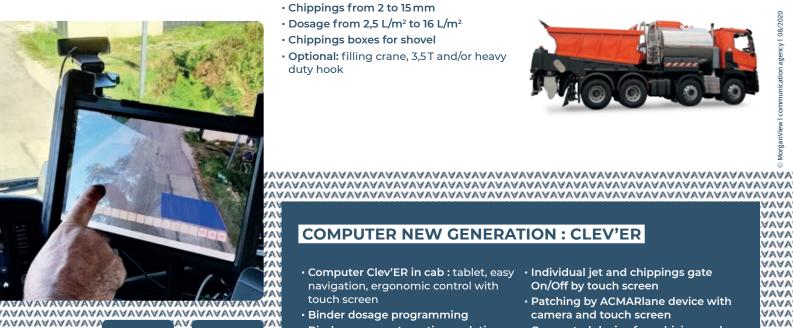

COMPUTER NEW GENERATION: CLEV'ER

- · Computer Clev'ER in cab: tablet, easy · Individual jet and chippings gate navigation, ergonomic control with touch screen
- Binder dosage programming
- Binder pump automatic regulation
- Truck engine regulation for optimum work speed

- On/Off by touch screen
- Patching by ACMARlane device with camera and touch screen
- Connected device for achiving and monitoring of job data

YAYA

AAAA

AAAA

VAVA

AAAA

AAAA

AAAA

AAAA

AAAA AAAA

